

AUTOTENSION


Technology for the Future

GENERAL DATA


-
-
-
-
-
-
-



VIBRATION ABSORBED

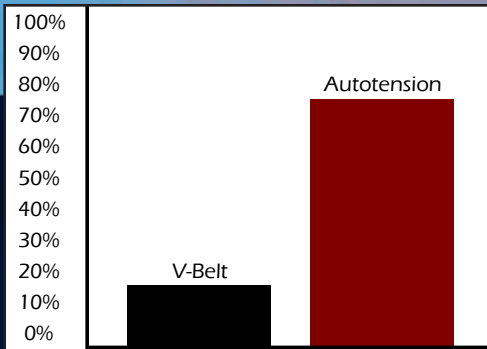

TENSION DECAY

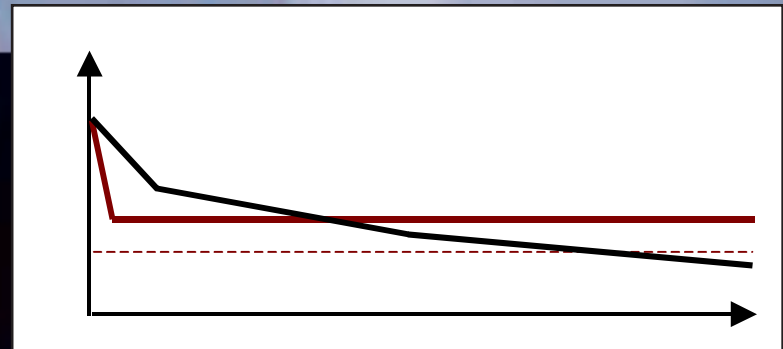

TECHNICAL DATA

| | | | |
|-------------------------|------------------------|--------------------------|------------------------|
| Thickness | 2.3 mm / 2.5 mm | 3.2 mm / 3.3 mm / 3.5 mm | 4.7 mm |
| Minimum Pulley Diameter | 8 mm | 16 mm | 45 mm |
| Max Linear Speed | 80 m/s | 60 m/s | 55 m |
| Linear Mass | 0.0042 kg / m / rib | 0.008 kg / m / rib | 0.020 kg / m / rib |
| Installation Tension | 20 a 30 N / rib / span | 30 a 50 N / rib / span | 70 a 90 N / rib / span |

Flexonic

Technology Provided by

HUTCHINSON
WORLDWIDE



JASON
BELTS & HOSE

340 Kaplan Drive • Fairfield, NJ 07004-6004
973-227-4904 • Fax: 973-227-1651
www.jasonindustrial.com

Branch Offices: Illinois - 630-752-0600
Florida - 813-241-4111
California - 323-265-8061
Texas - 972-438-6992
Montreal - 514-631-6781